

TOYNE DEMO PUMPER

TID NO. 13483



BODY

- Bolted Painted Stainless Steel Body
- ROM Roll-Up Doors
- Rear Slide-In Ladder and Pike Pole Storage
- Rear Slide-In Coffin Compartment Hard Suction Storage
- Storage for 8 SCBA Bottles in Wheel Wells
- Toyne Custom Under Step Storage



CHASSIS

- International HV607 4 Door Chassis
- Cummins ISL9 360 HP Engine
- 3000 EVS Transmission
- Seating for 5 Firefighters
- Back-Up Camera
- Front Mounted Tow Hooks



TANK

- 1200 Gallon UPF Tank
- ICI Soft Glo Tank Gauge
- Rear 2.5" Direct Tank Fill



PUMP

- Hale Qflo 1250 GPM Pump
- Fire Research Pump Boss Max Pressure Governor
- (2) 1.75" Crosslays
- Left side: 2.5" Discharge
2.5" Intake
Master Intake
- Right side: 2.5" Discharge
3" Discharge
Master Intake
- (2) Rear 2.5" Discharges
- Pre-Piped for Foam
- Pre-Piped for Monitor







ELECTRICAL

- Whelen LED Arrowstick
- Whelen Warning Lighting
- FRC LED 900-Q65 Scene Lights
- FRC SPA540-Q28 Telescoping Lights
- ILI LED Strip Compartment Lighting



	525W	RECENT	WET	DRY	100%	20%	SP
2.5%	67.15	4.20	1.4	26	—	35.55	—
5%	39.15	4.15	1.4	—	—	19.16	—
6.5%	67.15	44.00	1.4	26	28	37.40	—
8%	67.15	44.00	1.4	26	28	35.55	—
9.5%	67.15	44.00	1.4	26	28	35.55	—
10%	67.15	44.00	1.4	26	28	35.55	—
11%	67.15	44.00	1.4	26	28	35.55	—
12%	67.15	44.00	1.4	26	28	35.55	—
13%	67.15	44.00	1.4	26	28	35.55	—
14%	67.15	44.00	1.4	26	28	35.55	—
15%	67.15	44.00	1.4	26	28	35.55	—
16%	67.15	44.00	1.4	26	28	35.55	—
17%	67.15	44.00	1.4	26	28	35.55	—
18%	67.15	44.00	1.4	26	28	35.55	—
19%	67.15	44.00	1.4	26	28	35.55	—
20%	67.15	44.00	1.4	26	28	35.55	—
21%	67.15	44.00	1.4	26	28	35.55	—
22%	67.15	44.00	1.4	26	28	35.55	—
23%	67.15	44.00	1.4	26	28	35.55	—
24%	67.15	44.00	1.4	26	28	35.55	—
25%	67.15	44.00	1.4	26	28	35.55	—
26%	67.15	44.00	1.4	26	28	35.55	—
27%	67.15	44.00	1.4	26	28	35.55	—
28%	67.15	44.00	1.4	26	28	35.55	—
29%	67.15	44.00	1.4	26	28	35.55	—
30%	67.15	44.00	1.4	26	28	35.55	—
31%	67.15	44.00	1.4	26	28	35.55	—
32%	67.15	44.00	1.4	26	28	35.55	—
33%	67.15	44.00	1.4	26	28	35.55	—
34%	67.15	44.00	1.4	26	28	35.55	—
35%	67.15	44.00	1.4	26	28	35.55	—
36%	67.15	44.00	1.4	26	28	35.55	—
37%	67.15	44.00	1.4	26	28	35.55	—
38%	67.15	44.00	1.4	26	28	35.55	—
39%	67.15	44.00	1.4	26	28	35.55	—
40%	67.15	44.00	1.4	26	28	35.55	—
41%	67.15	44.00	1.4	26	28	35.55	—
42%	67.15	44.00	1.4	26	28	35.55	—
43%	67.15	44.00	1.4	26	28	35.55	—
44%	67.15	44.00	1.4	26	28	35.55	—
45%	67.15	44.00	1.4	26	28	35.55	—
46%	67.15	44.00	1.4	26	28	35.55	—
47%	67.15	44.00	1.4	26	28	35.55	—
48%	67.15	44.00	1.4	26	28	35.55	—
49%	67.15	44.00	1.4	26	28	35.55	—
50%	67.15	44.00	1.4	26	28	35.55	—
51%	67.15	44.00	1.4	26	28	35.55	—
52%	67.15	44.00	1.4	26	28	35.55	—
53%	67.15	44.00	1.4	26	28	35.55	—
54%	67.15	44.00	1.4	26	28	35.55	—
55%	67.15	44.00	1.4	26	28	35.55	—
56%	67.15	44.00	1.4	26	28	35.55	—
57%	67.15	44.00	1.4	26	28	35.55	—
58%	67.15	44.00	1.4	26	28	35.55	—
59%	67.15	44.00	1.4	26	28	35.55	—
60%	67.15	44.00	1.4	26	28	35.55	—
61%	67.15	44.00	1.4	26	28	35.55	—
62%	67.15	44.00	1.4	26	28	35.55	—
63%	67.15	44.00	1.4	26	28	35.55	—
64%	67.15	44.00	1.4	26	28	35.55	—
65%	67.15	44.00	1.4	26	28	35.55	—
66%	67.15	44.00	1.4	26	28	35.55	—
67%	67.15	44.00	1.4	26	28	35.55	—
68%	67.15	44.00	1.4	26	28	35.55	—
69%	67.15	44.00	1.4	26	28	35.55	—
70%	67.15	44.00	1.4	26	28	35.55	—
71%	67.15	44.00	1.4	26	28	35.55	—
72%	67.15	44.00	1.4	26	28	35.55	—
73%	67.15	44.00	1.4	26	28	35.55	—
74%	67.15	44.00	1.4	26	28	35.55	—
75%	67.15	44.00	1.4	26	28	35.55	—
76%	67.15	44.00	1.4	26	28	35.55	—
77%	67.15	44.00	1.4	26	28	35.55	—
78%	67.15	44.00	1.4	26	28	35.55	—
79%	67.15	44.00	1.4	26	28	35.55	—
80%	67.15	44.00	1.4	26	28	35.55	—
81%	67.15	44.00	1.4	26	28	35.55	—
82%	67.15	44.00	1.4	26	28	35.55	—
83%	67.15	44.00	1.4	26	28	35.55	—
84%	67.15	44.00	1.4	26	28	35.55	—
85%	67.15	44.00	1.4	26	28	35.55	—
86%	67.15	44.00	1.4	26	28	35.55	—
87%	67.15	44.00	1.4	26	28	35.55	—
88%	67.15	44.00	1.4	26	28	35.55	—
89%	67.15	44.00	1.4	26	28	35.55	—
90%	67.15	44.00	1.4	26	28	35.55	—
91%	67.15	44.00	1.4	26	28	35.55	—
92%	67.15	44.00	1.4	26	28	35.55	—
93%	67.15	44.00	1.4	26	28	35.55	—
94%	67.15	44.00	1.4	26	28	35.55	—
95%	67.15	44.00	1.4	26	28	35.55	—
96%	67.15	44.00	1.4	26	28	35.55	—
97%	67.15	44.00	1.4	26	28	35.55	—
98%	67.15	44.00	1.4	26	28	35.55	—
99%	67.15	44.00	1.4	26	28	35.55	—
100%	67.15	44.00	1.4	26	28	35.55	—

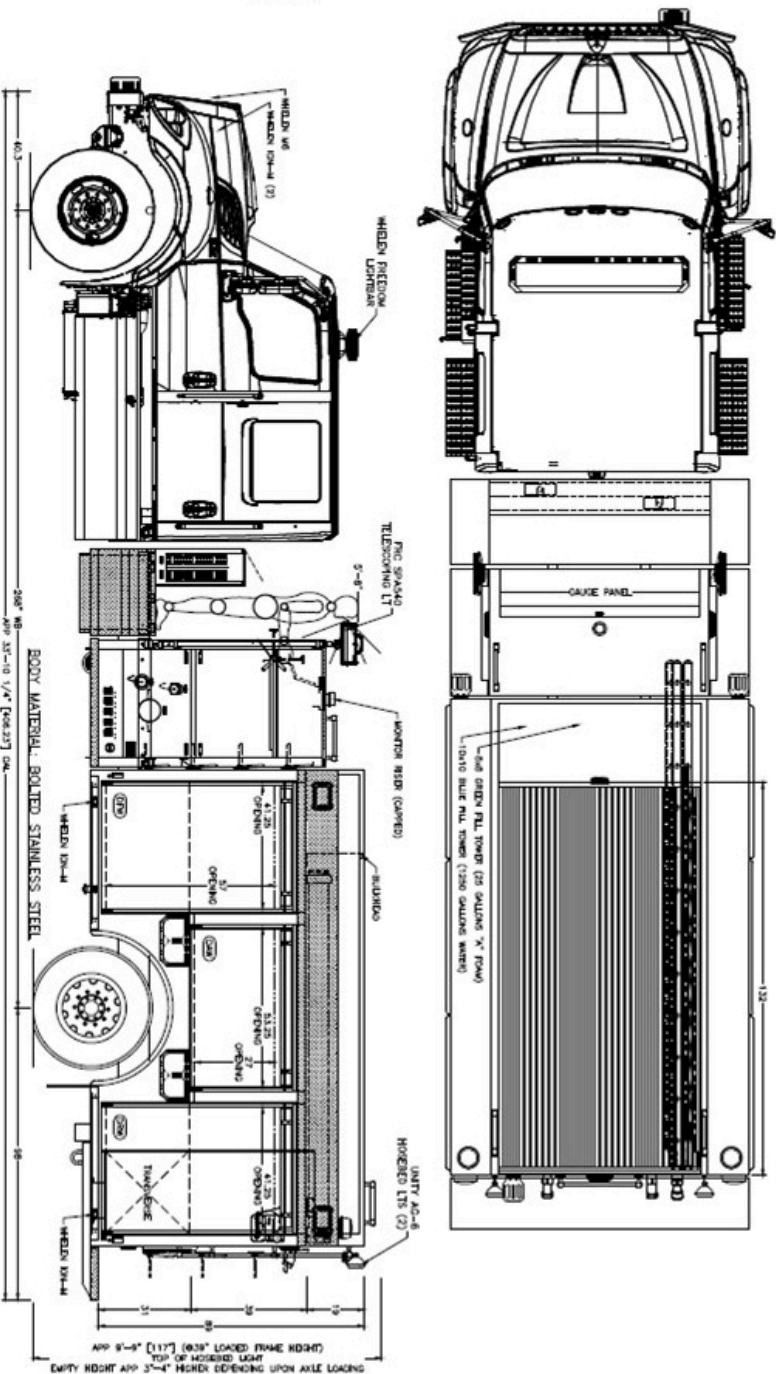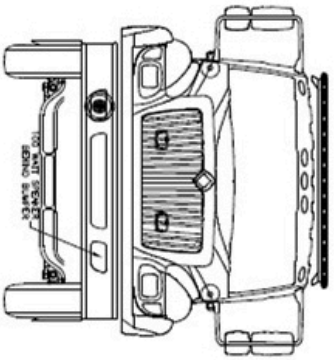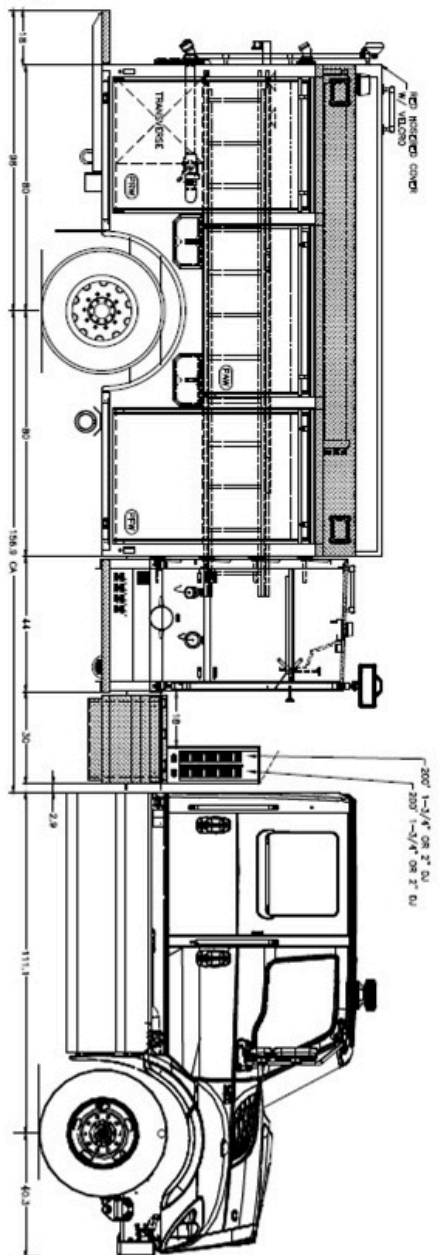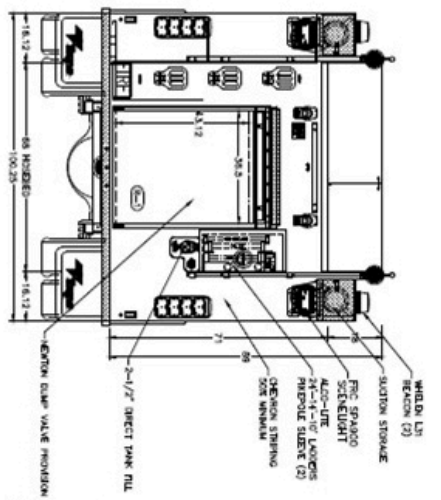

NOTE: DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR CHANGE AS MAY BE FOUND NECESSARY DURING CONSTRUCTION. MINOR DETAILS MAY NOT BE SHOWN. IF DISCREPANCIES EXIST BETWEEN THIS DRAWING AND THE WRITTEN SPECIFICATIONS PROVIDED BY TOWNE, THE WRITTEN SPECIFICATIONS SHALL PREVAIL.

ORIGINAL DRAWING: 08AUG02	CHASSIS:	IHC HX607 4 DOOR 4X2	SCALE: 1/66	SHEET: A
	WB-C-A-AF:	266"-157.7'-4" D17	CITY: --	
	BODY MATL:	BOLTED STAINLESS STEEL	STATE: --	
	PUMP:	HALE OFLO PLUS 125	DUR: TOY	
	TANK:	1200/25 POLY TANK	CAD: GROSSMAN	
	FOAM SYSTEM:	PNE-PIPE	DATE: 06 AUGUST 2024	
	GENERATOR:	N/A	FILE: 13483DEMO	



BREDA, IA 51436
 800-648-3358
 WWW.TONNE.COM

DEMO

CUSTOM PUMPER

TOYNE
FIRE & LIFE PROTECT

BREDA, IA 51436
800-648-3358
WWW.TOYNE.COM

DEMO
CUSTOM PUMPER